

PRODUCT CHARACTERISTICS NICKEL-CADMIUM BATTERIES

- high temperature cells: 5-50 °C
- NiCd - Batteries
- SC-, D- cells
- different cell configurations & connectors
- charging Time: 24h
- expected Lifespan: 4 years
- 12 Months warranty

TECHNICAL INFORMATION NICKEL- CADMIUM BATTERIES


	SC-Cell	D-Cell
Temperature range	5-50°C	5-50°C
Voltage / Cell	1,2V	1,2V
Capacity	1,8Ah	4,5Ah
Diameter	23 mm	33 mm
Length / Cell	43,25 mm	60 mm

TEXT MARK


CE [only for use in emergency lighting]

DIMENSION DRAWING



2 SC-cell NiCd Rod [NL-6-3961-2/1/EH]

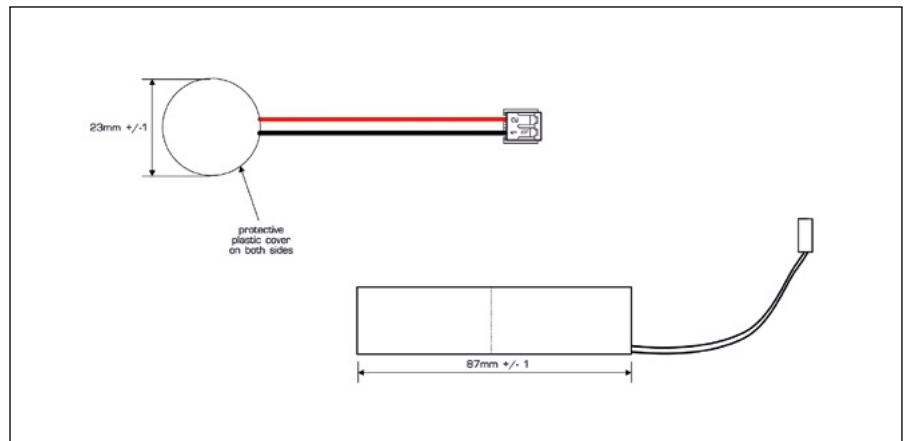

4 SC-cell NiCd Double Rod [NL-6-3961-4/1/EH]

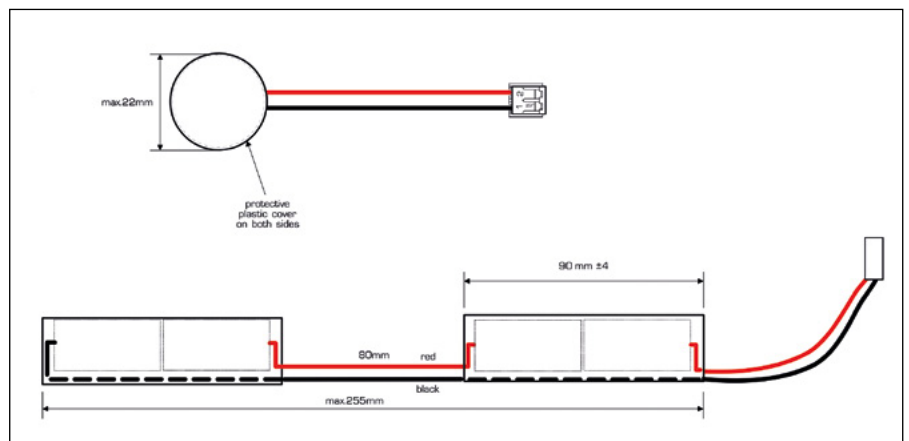

2 D-cell NiCd Rod [NL-6-3961-2/4/EH]

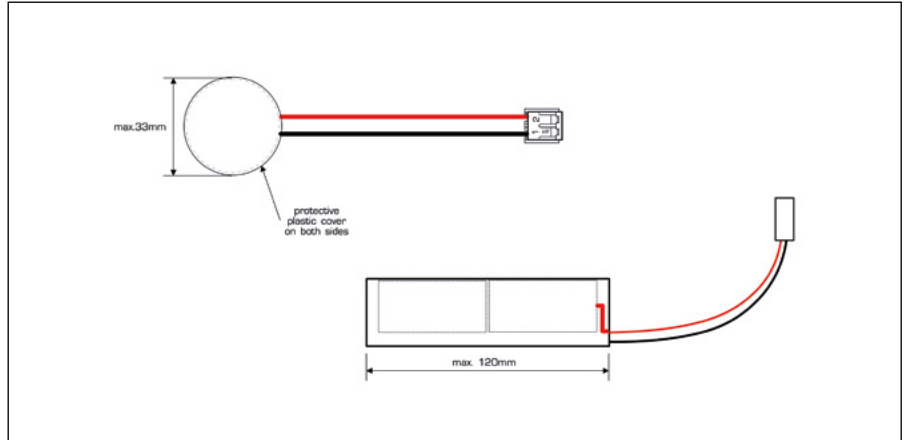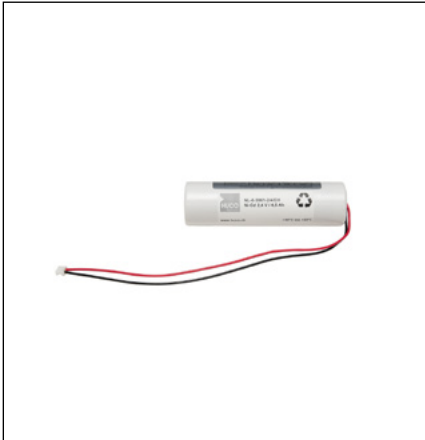

4 D-cell NiCd Rod [NL-6-3961-4/4/EH]

